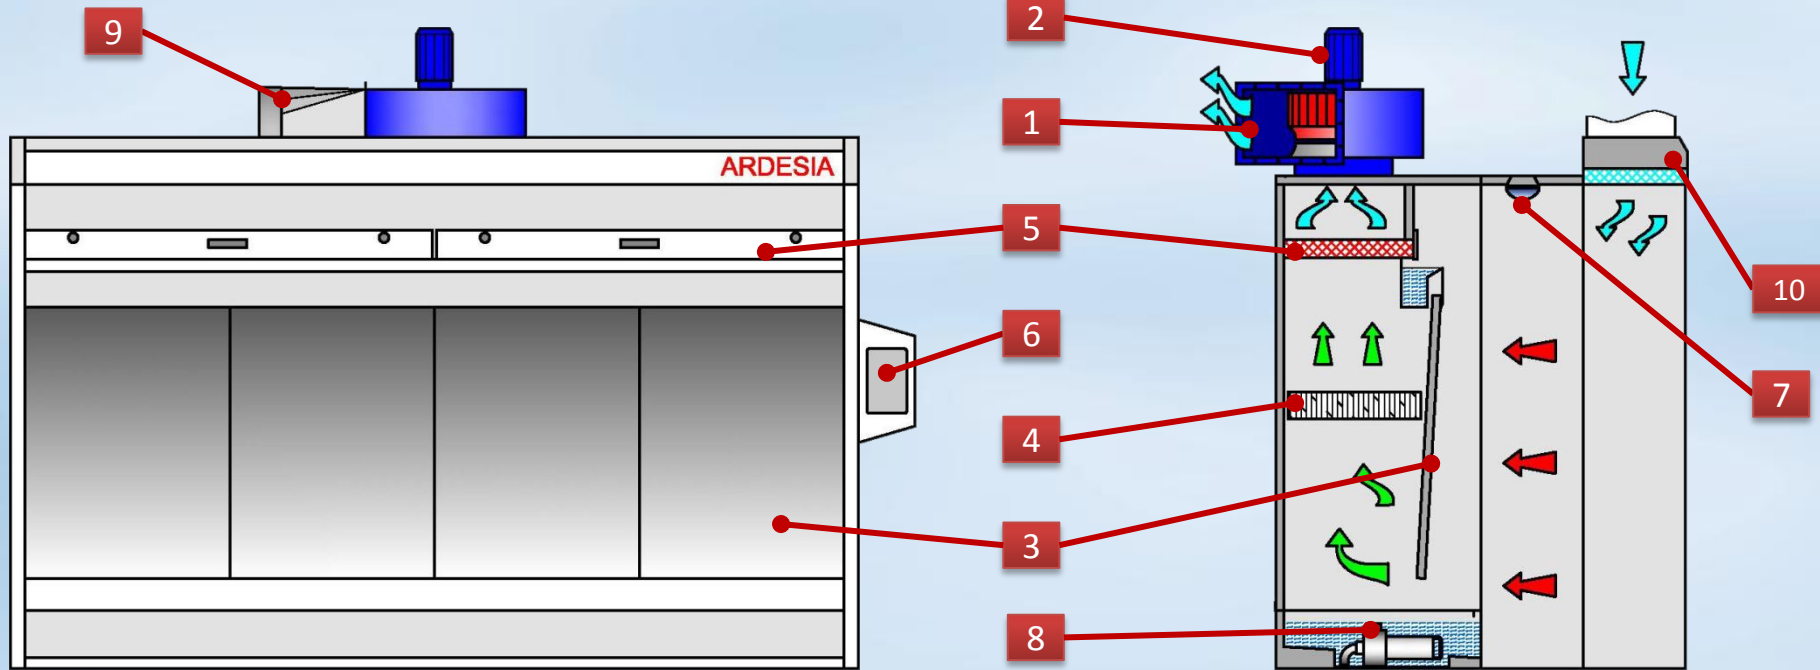


**ACTIVE SOLUTIONS BETWEEN
INDUSTRY AND AMBIENCE**



**DESCRIPTION:**

This type of painting booth is suitable for suctioning and demolishing the pigments and fumes emitted from paint-spray made with synthetic solvents, organic and water. The removal of the pigments and fumes occurs with a frontal veil of water, the separation of water droplets through plastic trays and air filtration with "Paint-Stop" filter drawers. This booth is built with modular panels of galvanized press-folded sheet-iron.

EQUIPMENT:

1. Antispark centrifugal electrical fan
2. Energy-saving electric motor IE2
3. Frontal modular veil
4. Drop separator "Filler"
5. Metallic drawers with "Paint-stop" filter
6. Wired electrical panel IP55 with timer
7. Wired ceiling light IP65
8. Stainless steel electrical immersion pump
9. Change section
10. Integrating air inlet filter (option)

MODEL: SINGLE

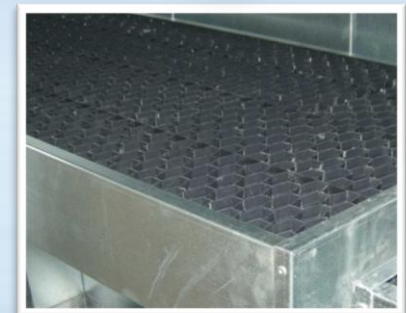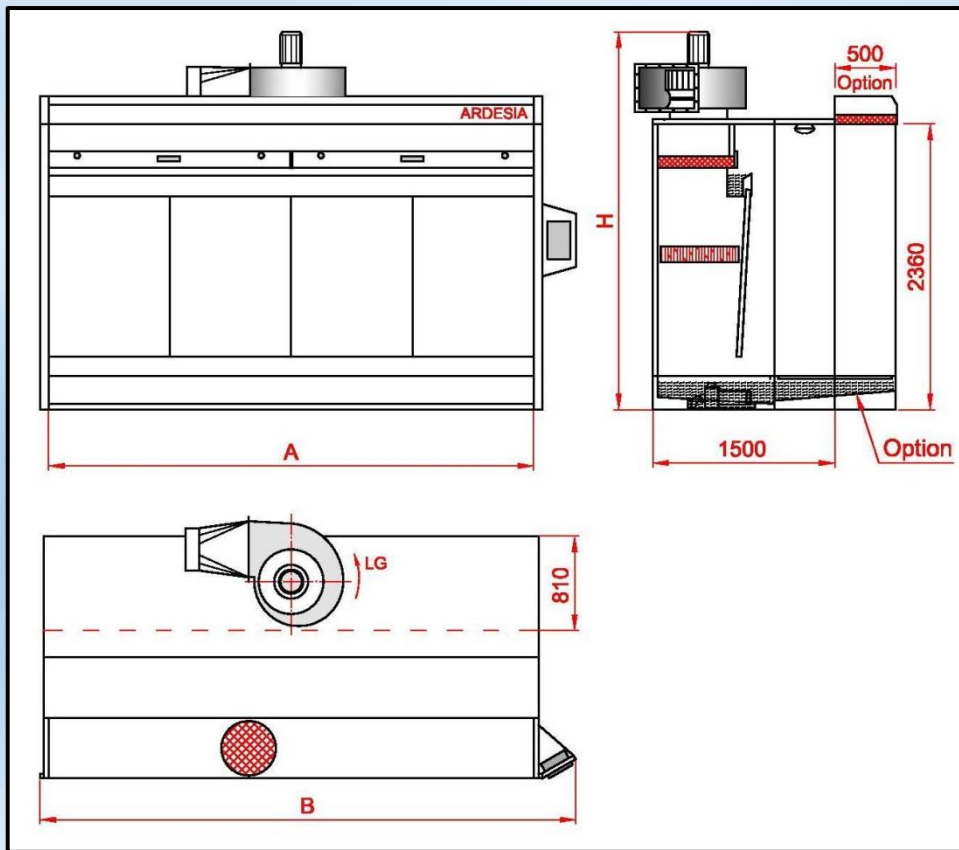

Model	A Usable width, mm	B Overall width, mm	H Overall height, mm	Illuminati on, N x Wt	Exhaust fan, power, kW	Pump, power, kW	Nominal air flow m ³ / h
SINGLE - 2	2000	2450	3180	2 x 58	1,5	0,75	8000
SINGLE - 3	3000	3450	3250	2 x 58	2,2	0,75	11000
SINGLE - 4	4000	4450	3300	2 x 58	4,0	1,1	15000
SINGLE - 5	5000	5450	3250	4 x 58	2,2+2,2	1,1	22000
SINGLE - 6	6000	6450	3250	4 x 58	3,0+3,0	1,5	25000